

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 022 346 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
26.07.2000 Bulletin 2000/30

(51) Int. Cl.⁷: **C21D 9/00**, B21G 3/06,
F16B 15/00

(21) Application number: 00400076.6

(22) Date of filing: 13.01.2000

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 13.01.1999 US 229527

(71) Applicant:
ILLINOIS TOOL WORKS INC.
Glenview, Cook County, Illinois 60025 (US)

(72) Inventors:

- Lat, Geronimo E.
Ivanhoe, Illinois 60060 (US)
- Spoto, Louis M.
Huntley, Illinois 60142 (US)
- Godsted, Kent B.
Grayslake, Illinois 60030 (US)

(74) Representative: **Bloch, Gérard**
2, square de l'Avenue du Bois
75116 Paris (FR)

(54) Nails having selected heat treatment and hardening

(57) A selectively hardened nail (10) includes a nail head (12), an elongated shank (14), and a tip (16). A portion (15) of the nail shank (14) is made harder than the remainder by selectively heat treating that portion, and cooling it. The nail has controlled bending properties. The selectively hardened portion does not significantly bend when the nail (10) is fired at a surface using a power driving tool, or during use of the nailed object.

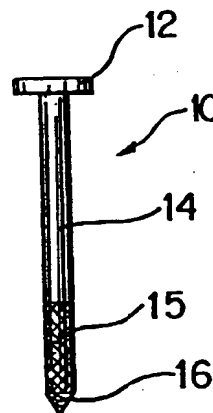


FIG. 2

EP 1 022 346 A1

Description**FIELD OF THE INVENTION**

[0001] This invention relates to nails and similar elongated fasteners having portions selectively hardened to create desired properties and behavior, and a method of making the selectively hardened nails.

BACKGROUND OF THE INVENTION

[0002] Various techniques are known for treating the surfaces of nails and similar elongated fasteners. U.S. Patents 5,655,969 and 5,564,876 disclose nails manufactured from carbon steel wire pre-coated with a protective metallic layer having corrosion resistant properties. The nails also have a protective corrosion-resistant cap. U.S. Patent 5,178,903 discloses coating a nail with zinc, followed by a polyurethane resin.

[0003] U.S. Patent 4,486,248 discloses wear-resistant railroad rails produced by controlled forced cooling from above the austenite transition temperature, to yield a fine perlite metallurgical structure in the head portions of the rails.

[0004] One type of nail used in the construction industry is a positive placement nail. Positive placement nails are typically driven with a high powered driving tool to hold a steel plate to wood. The nails are driven through holes present in the steel plate, and into the wood. This construction method is used for building foundations, floor joists and roofing. Some positive placement nails are hardened in a batch process to improve their strength. This process, which involves heat treating and hardening the entire length of the nail, is expensive and time consuming, and difficult to control.

[0005] The holes in the steel plate may only be slightly larger than the shank diameter of the nail and are smaller than the head diameter of the nail. When the nails miss the holes and hit the steel plate at high speed, they become bent or distorted at the contact end and ricochet. Nails which ricochet create obvious hazards for the tool operator and others in the area.

[0006] Pallet nails used in the crating and construction industries hold pallets together. Pallet nails are generally long and thin so as not to split the hardwood boards of the pallet. A pallet nail with a larger shank diameter has a greater tendency to split the pallet boards during driving than a nail with a smaller shank diameter. If a pallet nail is too thin, it bends easily, especially at the junction between the top pallet board and the skid. This bending often occurs during severe service of a pallet, when the fork lift bumps into the side of the pallet creating stress between a pallet board and skid. It has been difficult to develop a pallet nail which minimizes board splitting and resists bending.

SUMMARY OF THE INVENTION

[0007] The present invention provides nails which are hardened only at selected locations for the purpose of improving performance in their specialized use. In one embodiment, only the pointed end and lower shank portion of the nail is made harder than the upper portion of the shank. In another embodiment, a central region of an elongated nail shank is made harder than portions of the shank above and below the region. Other embodiments are also contemplated.

[0008] The selective hardening is accomplished by heating a portion of the nail to a temperature higher than about 750°C, and then quenching (i.e. rapidly cooling) it. The selective heating causes that portion of the nail to transform from a ferritic pearlitic structure to an austenitic structure. The quenching transforms the austenitic structure to a martensitic structure, which is harder and less ductile than the untreated structure. The untreated portion of the nail has a ferritic pearlitic structure, which is softer and more ductile. The treated portion of the nail is more resistant to bending.

BRIEF DESCRIPTION OF THE DRAWINGS**[0009]**

Fig. 1 illustrates a positive placement nail of the prior art, bent because of firing into a portion of a steel plate without a hole.

Fig. 2 illustrates a positive placement nail of the invention, whose lower end is selectively hardened.

Fig. 3 illustrates how the positive placement nail of Fig. 2 may bend when fired into a portion of a steel plate without a hole.

Fig. 4 illustrates a pallet nail of the prior art, bent at its upper end between the top pallet board and the skid, because of severe service of the pallet.

Fig. 5(a) illustrates a pallet nail of the invention, having an upper portion selectively hardened.

Fig. 5(b) illustrates another embodiment of a pallet nail of the invention, having a selectively hardened portion below its upper end, to prevent bending when stress is applied between a pallet board and adjacent skid.

Fig. 6 is a top view of a heating apparatus for making selectively hardened nails.

DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS

[0010] Fig. 1 illustrates a positive placement nail 10 of the prior art, having a head portion 12, an elongated shank 14, and a tip 16. These nails are typically driven into wood and other foundation materials through narrow pre-formed holes in a support plate made of relatively heavy steel, or a similar heavy metal material. The holes in the support plate are slightly larger than the

diameter of nail shank 14 and smaller than the diameter of head 12. The nails 10, which are fired using a power driving tool, may miss the openings and strike the steel plate. When this happens using a typical, non-hardened nail, the tip of the nail is not hard enough to penetrate the steel. The shank 14 may bend in a semi-circular fashion as shown in Fig. 1. and the nail 10 may ricochet or skip at high speed, creating a hazardous working environment. In some prior art nails, to make the tips sufficiently hard to penetrate the steel, the entire nails were hardened in an expensive, time-consuming off-line batch process.

[0011] Fig. 2 illustrates a positive placement nail 10 of the invention in which the lower portion 15 (including part of shank 14 and the tip 16) have been selectively hardened. The selective hardening is accomplished by selectively heating the lower portion 15 to a temperature of at least about 750°C, preferably about 800-1100°C, most preferably about 850-1000°C, and then quenching (rapidly cooling) the nail. The selective heating causes the heated portion of the nail, which is typically made of carbon steel, to transform from a ferritic pearlitic metallurgical structure to an austenitic metallurgical structure.

[0012] The heated nail is quenched using an aqueous bath or spray, an air-assisted spray or another suitable quenching medium. The quenching causes the previously heated portion 15 to transform from an austenitic metallurgical structure to a martensite structure, which is harder and less ductile than the original structure. The nail may be quenched by dipping or dropping the entire nail into the quenching fluid, or by aiming the quenching fluid at the nail or at only the heated portion of the nail. The temperature of the quenching fluid is desirably about 4-95°C, preferably about 10-70°C, more preferably about 15-40°C. Tap water or other process water is a suitable quenching medium. Other quenching media can also be employed, including without limitation process oil. The quenching time need not be more than about 30 seconds, and is preferably about 3-10 seconds. The nails may still be warm (up to 400-450°C) after removal from the quenching medium, in order to facilitate drying.

[0013] The resulting selectively treated nail has different hardnesses at different axial positions along the nail. The nail has a lower shank portion 15 (including tip 16) which is harder at that axial position than the remainder of the shank 14 at other axial positions. The selectively hardened axial portion may have a Rockwell "C" ("R_C") hardness value of at least about 45, preferably at least about 50, more preferably at least about 55. The remaining axial portion of shank 14 may have an R_C value at least about 10 units lower than the R_C value of the hardened portion 15. Desirably, the untreated axial portion of shank 14 may have an R_C value of about 35 or less.

[0014] The axial portion 15 of the nail which is selectively hardened (including the tip 16) may have a length of about 0.2-3 cm, preferably about 0.5-2 cm,

more preferably about 1-1.8 cm. The nail 10 may have an overall shank length (including tip) of at least about 3.2 cm, preferably at least about 4 cm, more preferably about 4.5-9 cm. Preferably, the length of the selectively hardened axial portion 15 (including tip 16) will not exceed 50% of the total length of shank 14 (including tip 15), in order to reduce the energy cost compared to conventional methods of heat treating an entire nail.

[0015] The nail 10 may be constructed of carbon steel or another hardenable material. The carbon steel may have a carbon content of about 0.08-0.50% by weight. Carbon steel having a carbon content of about 0.15-0.45% by weight is desirable, with a range of about 0.20-0.40% being preferred for the positive placement construction nails.

[0016] The selectively hardened positive placement nail 10 of the invention exhibits a controlled bending when misfired into a solid portion of a steel support plate. This controlled bending is illustrated in Figs. 3(a) and 3(b). The selectively hardened nail 10 does not assume the semi-circular configuration associated with prior art non-hardened nails that ricochet when misfired. Instead, when the selectively hardened nail 10 strikes a solid steel plate at high speed, the lower hardened portion 15 is sufficiently hard to penetrate the steel, and remains substantially straight and free of bending. The nail shank 14 bends sharply in at least one location, and possibly two locations, in the softer portion above the hardened portion 15. The energy and momentum of the misfired nail is absorbed into the sharp bending of the softer portion of the nail shank.

[0017] In contrast, the shank of a fully hardened prior art nail will not bend. If a fully hardened nail is misfired into the steel plate, the nail may only partially penetrate, causing the tool to bounce back or recoil due to additional stress created. The partially hardened nail of the invention also reduces or eliminates the ricocheting of misfired non-hardened nails, resulting in a safer working environment.

[0018] The selectively hardened nail also exhibits better holding force during shear than a nail which is completely heat treated and hardened. When a shear force is applied to move the above-mentioned steel cover plate laterally along the surface of the wooden substrate, or vice versa, the selectively heat treated nail may bend in the non-hardened regions. The holding power of the nail is maintained because the top portion of the nail is not disturbed, and stays in full contact with wood to aid in holding against the shear force. A fully hardened nail, by comparison, cannot readily bend. Accordingly, the entire length of the nail is released from the wood when the shear force causes enlargement of the nail hole.

[0019] Fig. 4 illustrates a pallet nail 20 of the prior art, having a head portion 22, an elongated shank 24, and a tip 26. These nails are typically driven into hardwood boards used to make pallets and crating. These types of wood boards have a propensity for splitting.

Pallet nails are typically long and narrow, and typically have one or more threaded regions 28. The nails must have enough length and column strength to adequately penetrate the wood, yet be small enough in diameter so as not to split the pallet boards during driving. A common problem with pallet nails is that they sometimes bend about 0.5 inch below the head portion during abuse of the pallet, as shown in Fig. 4. This bending results from stress at the junction between a pallet board and adjacent skid, and renders the nails less effective for maintaining the integrity of the pallet.

[0020] In order to strengthen the pallet nails in the regions which typically bend, the selective hardening technique described above may be applied to the upper axial portions of the pallet nails. Fig. 5(a) illustrates one embodiment of a pallet nail in which an upper region 25 of the shank 24, extending below the head 22, has been selectively heat treated and hardened. Fig. 5(b) illustrates another embodiment in which the selectively heat treated and hardened region 25 is located at a distance centered about 0.5 inch below the head 22, but still in the upper portion of shank 24. In Fig. 5(b), the intermediate hardened region 25 has untreated softer regions above and below on the shank 24. As shown in Fig. 5(b), the hardened region 25 corresponds to the junction between a typical pallet board 27 and adjacent stringer board 29.

[0021] The process for making the selectively heat treated pallet nails is essentially the same as for the selectively heat treated positive placement nails, described above, with the main difference being that the heat treatment is applied to different regions on the nails. The heating temperatures and quenching techniques are substantially the same, but may vary depending on various parameters such as the desired hardness of the resulting nail part or the carbon content of the steel. The pallet nails 20 may also be constructed from carbon steel or another suitable material. Carbon steel having a carbon content of about 0.08-0.50% by weight is useful, while a range of about 0.15-0.45% is desirable, and a range of about 0.18-0.35% is preferred for the pallet nails.

[0022] Again, the treated axial region 25 should have a Rockwell "C" ("R_C") hardness at least about 10 units higher than the R_C values of the untreated axial region or regions on the shank 24. For instance, the treated region 25 may have an R_C value of at least about 40, preferably at least about 45, more preferably at least about 50. The untreated region or regions may have an R_C value of about 35 or less.

[0023] Pallet nails typically range from about 3-9 cm in length. The diameters are typically narrow, and range between about 0.19-0.4 cm. By providing selectively hardened pallet nails that will not bend near the top during pallet use, the pallet nails can be provided with smaller shank diameters without sacrificing other desirable properties, such as bending resistance. This not only permits cost savings, but also improves the nail

performance because smaller diameter pallet nails are less likely to split the wooden substrate, and are easier to fully drive into the substrate.

[0024] Referring to Figs. 5(a) and 5(b), the selectively hardened region 25 may have a length of about 0.20-1.0 inch, preferably about 0.30-0.75 inch, more preferably about 1-1.6 cm. The selectively hardened portion 25 may commence just below the head 22 (Fig. 5(a)), or within about 1 cm inch down from the head 22 (Fig. 5(b)). Preferably, the selectively hardened portion 25 commences about 0.5-0.80 cm below the head 22.

[0025] Fig. 6 schematically illustrates an apparatus 100 useful for heat treating selected axial portions of a large number of nails on a continuous basis. Flammable gas from a source (not shown) enters the apparatus and is injected into a semi-circular manifold 108 located on a base 102. Firing burners 110 receive flammable gas from the manifold 108. Firing burners 110 each include a nozzle which fires burning gas outward toward a semi-circular exhaust chamber 116.

[0026] A central disk 118 having a toothed outer periphery is rotated immediately above the firing burners 110. A chain 124 is located radially outward of the disk during rotation of the disk for approximately 270°. The chain 124 and outer periphery of disk 118 travel at the same speed and hold nails 30 in a substantially vertical orientation in front of burners 110. When not in contact with disk 118, the chain 124 passes around a series of sprockets remote from the disk.








[0027] The nails 30 enter the furnace via inlet conveyor 122, whereupon they are inserted into openings between disk 118 and chain 124, and are captured between the disk and chain. As the disk 118 travels in the circular path, a selected portion of each nail 30 is exposed to, and heated by the burners 110. After passing the last burner 110, the nails 30 pass to the exit chamber 126, whereupon they are ejected and quenched. In a preferred embodiment, nails 30 are dropped into a bath of turbulent water where they are quenched for a short time, and then removed for further processing.


[0028] The carrier disk 118 and chain 124 may define over 100, and possibly several hundred linkage openings. Thus, the apparatus 100 may selectively heat a large number of nails on a continuous basis, to very high temperatures. By varying the size and positions of the burners 110, the apparatus 100 can be used to heat select narrow portions of the nails, or wider portions, and may be used to heat upper, lower or intermediate portions.

[0029] While the embodiments of the invention disclosed herein are presently considered preferred, various modifications and improvements can be made without departing from the spirit and scope of the invention. For instance, the selective hardening may be advantageously employed in other fastener types, including without limitation corrugated fasteners, framing nails, steel stud nails, and staples.

Claims

1. A selectively hardened nail, comprising a nail head (12 ; 22), an elongated shank (14 ; 24), and a tip (16 ; 26), the nail including :
 - a selectively hardened portion (15 ; 25), encompassing an axial part of the shank,
 - a softer portion, encompassing another axial part of the shank.
2. The nail of claim 1, wherein the selectively hardened portion encompasses a lower axial part (15) of the nail shank (14) and the tip (16). 15
3. The nail of claim 1, wherein the selectively hardened portion encompasses an upper axial part (25) of the nail shank (24) below the head (22). 20
4. The nail of claim 1, wherein the selectively hardened portion encompasses an intermediate axial part (25) of the nail shank (24). 20
5. The nail of one of claims 1 to 4, wherein the selectively hardened portion has a Rockwell "C" hardness of at least about (40). 25
6. The nail of claim 5, wherein the selectively hardened portion has a Rockwell "C" hardness of at least about (45). 30
7. The nail of claim 6, wherein the selectively hardened portion has a Rockwell "C" hardness of at least about (50). 35
8. The nail of one of claims 1 to 7, wherein the softer portion has a Rockwell "C" hardness of not more than about 35. 40
9. The nail of one of claims 1 to 4, wherein the selectively hardened portion has a martensitic metallurgical structure ; and the softer portion has a ferritic pearlitic metallurgical structure. 45
10. The nail of claim 9, wherein the martensitic metallurgical structure is untempered.
11. The nail of claim 9, wherein the selectively hardened portion of the nail has a Rockwell "C" hardness at least about 10 units higher than the softer portion. 50
12. The nail of claim 9, comprising a positive placement construction nail. 55
13. The nail of claim 9, comprising a pallet nail.
14. The nail of one of claims 1 to 4, wherein the selectively hardened portion has been selectively heated to at least about 750°C and quenched.
15. The nail of claim 14, wherein the selectively hardened portion has been heated to about 800-1100°C.
16. The nail of claim 14, wherein the selectively hardened portion has been heated to about 850-1000°C.

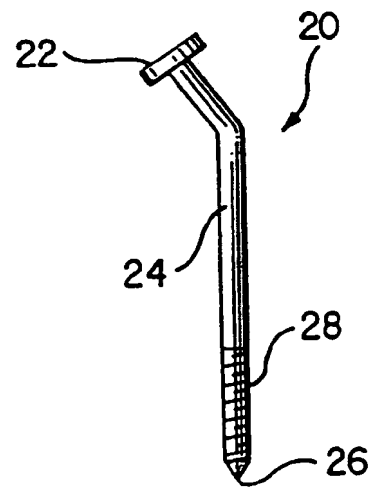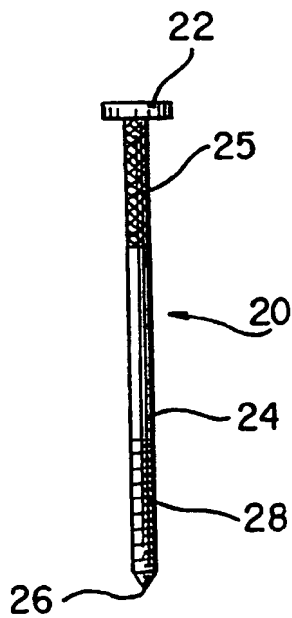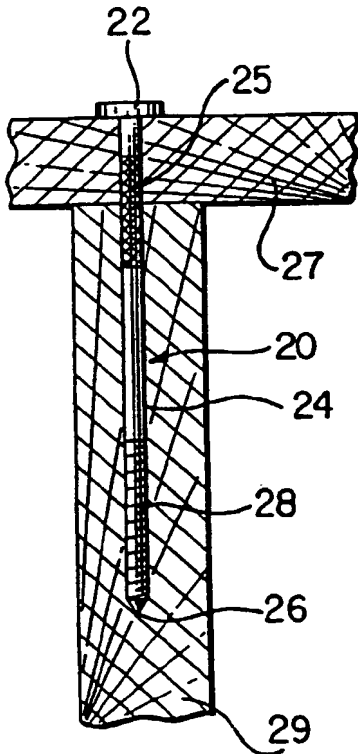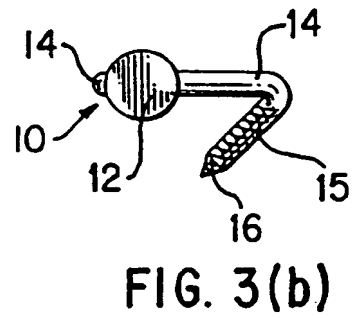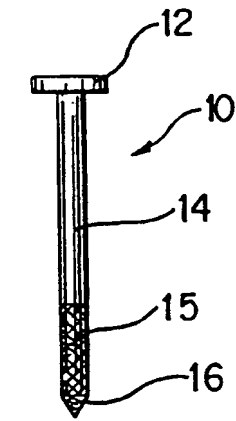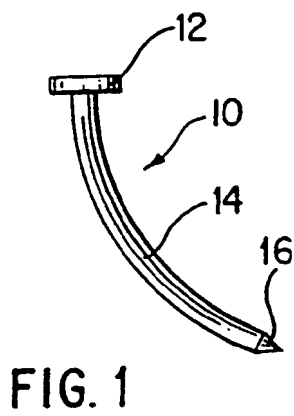

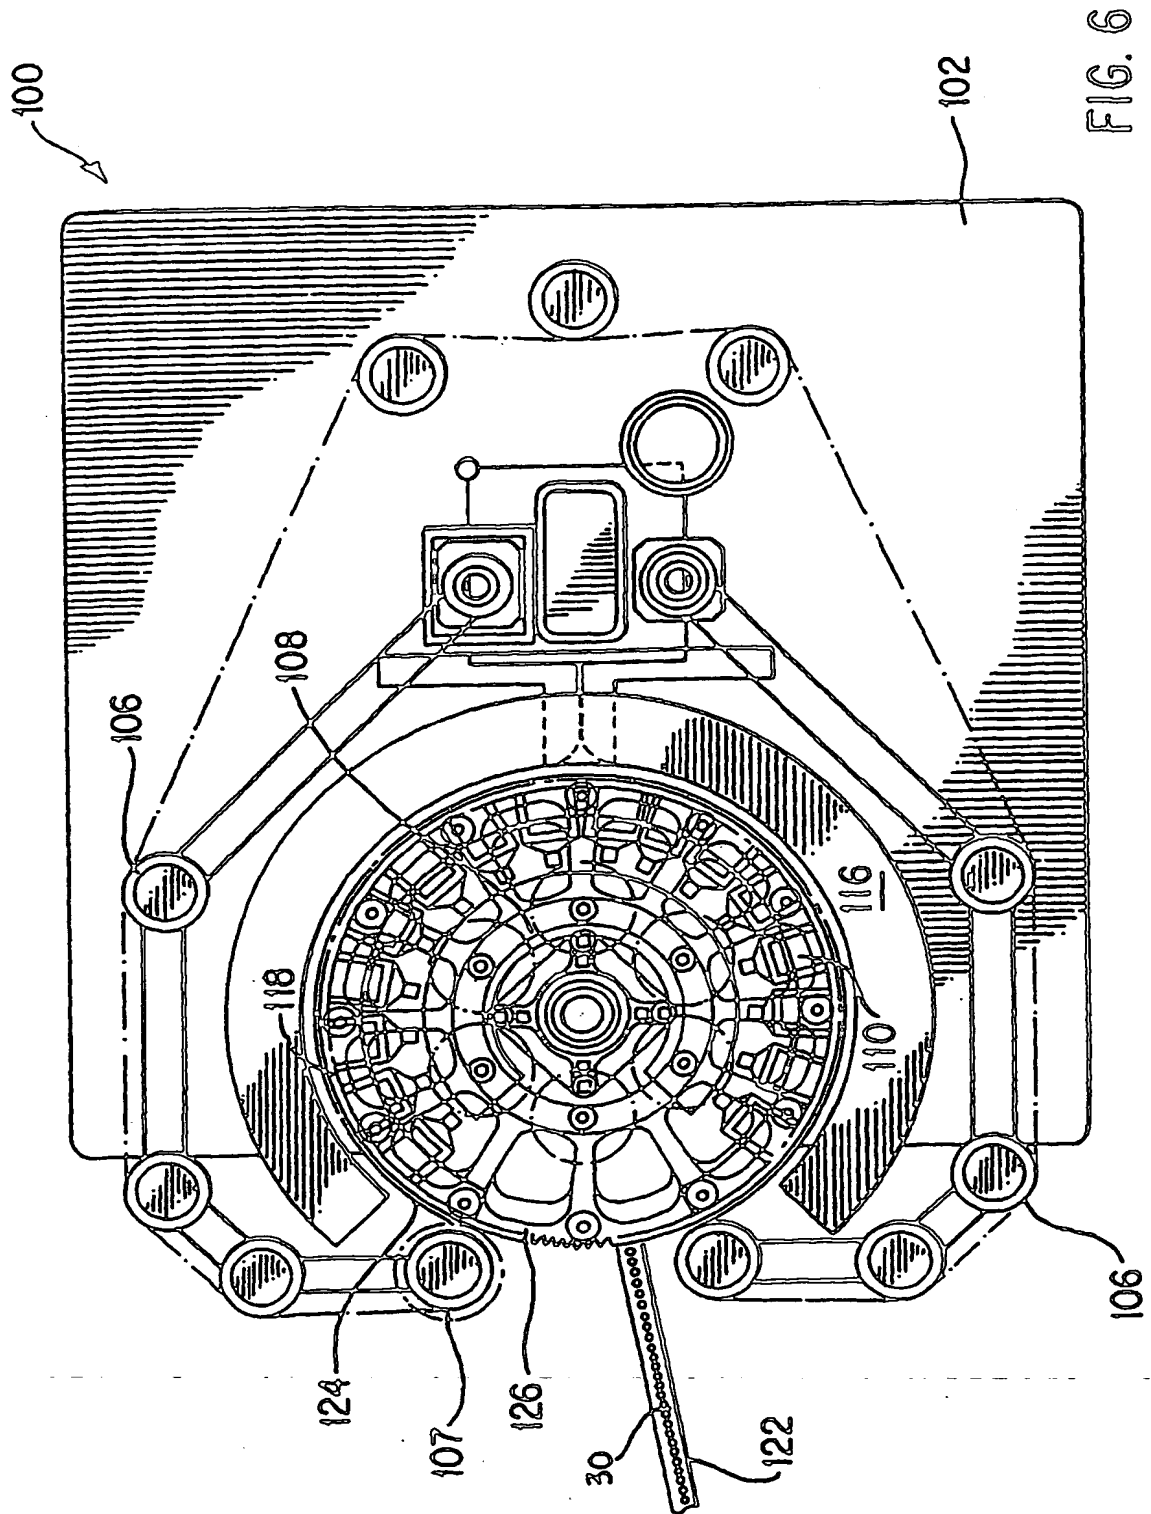



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 40 0076

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL.7)
X	EP 0 563 826 A (INLEX LOCKING LTD) 6 October 1993 (1993-10-06) Abstract * column 1, line 56 - column 2, line 1 * * column 6, line 38-49 *	1,2	C2109/00 B21G3/06 F16B15/00
A	US 5 741 104 A (GABRIEL WILLIAM L ET AL) 21 April 1998 (1998-04-21) * column 3, line 36-39 * * column 5, line 11-13 *	5-8,11	
A	DE 26 20 449 A (CENTRE RECH METALLURGIQUE) 25 November 1976 (1976-11-25) * claim 1 *	9,10	
A	US 3 769 103 A (HOLCOMB N ET AL) 30 October 1973 (1973-10-30) * the whole document *	1-16	
			TECHNICAL FIELDS SEARCHED (Int. CL.7)
			C21D B21G F16B
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 11 April 2000	Examiner Huusom, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 40 0076

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-04-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0563826 A	06-10-1993	GB 2265911 A	13-10-1993
		AT 169688 T	15-08-1998
		DE 69320231 D	17-09-1998
		DE 69320231 T	24-12-1998
		ES 2121886 T	16-12-1998
		JP 6018177 A	25-01-1994
		US 5350467 A	27-09-1994
US 5741104 A	21-04-1998	US 5489179 A	06-02-1996
		AU 688713 B	12-03-1998
		AU 1909997 A	27-11-1997
		BR 9702410 A	15-09-1998
		CA 2202015 A	22-11-1997
		JP 10054410 A	24-02-1998
		NZ 314830 A	28-10-1998
		BR 9503181 A	28-05-1996
		CA 2156457 A	20-02-1996
		DE 69505212 D	12-11-1998
		DE 69505212 T	04-03-1999
		EP 0697531 A	21-02-1996
		JP 8170619 A	02-07-1996
		KR 183382 B	15-05-1999
		US 5749692 A	12-05-1998
		US 5642974 A	01-07-1997
		ZA 9506777 A	20-03-1996
DE 2620449 A	25-11-1976	BE 829089 A	14-11-1975
US 3769103 A	30-10-1973	AU 471188 B	27-09-1973
		AU 4037872 A	27-09-1973
		BE 780527 A	03-07-1972
		CA 950808 A	09-07-1974
		CA 959939 A	24-12-1974
		DE 2211608 A	05-10-1972
		DK 131384 B	07-07-1975
		FR 2130676 A	03-11-1972
		GB 1376025 A	04-12-1974
		GB 1376026 A	04-12-1974
		IT 952337 B	20-07-1973
		JP 55025289 B	04-07-1980
		SE 391194 B	07-02-1977
		SE 395718 B	22-08-1977
		SE 7410621 A	21-08-1974
		US 4112812 A	12-09-1978

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)